Monogram™

ZGG24L20BSS—GE Monogram 24" Outdoor Cooking Center

Dimensions and Specifications (in inches)

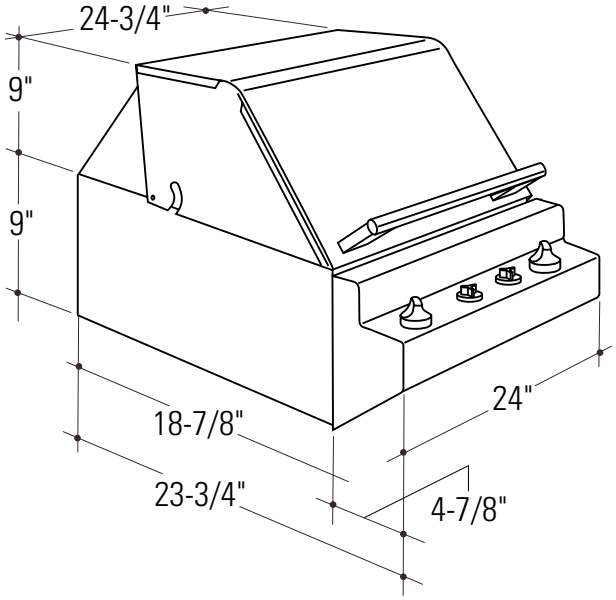

Note: Reference Monogram Outdoor Cooking Center Installation Instructions, packaged with product, for complete details.

24" Liquid Propane Gas Model:
2 Grill Burners

- Monogram Outdoor Cooking Centers are designed to be installed on a grill cart or into an enclosure.
- **These cooking centers are designed for outdoor use only**. Do not locate the grill in a building, garage or other enclosed area.
- Ensure that fresh air ventilation is adequate.
- Consider exposure to wind and proximity to traffic paths.
- The minimum clearances to combustibles must be maintained at all times.
- Do not install a grill below overhead unprotected combustible construction.
- The installation must conform to local codes or in the absence of local codes, with the national fuel gas code, ANSI Z223 latest edition.

For answers to your Monogram,®
GE Profile Performance Series,™
GE Profile™ or GE appliance questions, call
GE Answer Center® service, 800.626.2000.

Listed by Underwriters Laboratories

Specification Revised 10/00

Monogram™

ZGG24L20BSS—GE Monogram 24" Outdoor Cooking Center

Dimensions and Specifications (in inches)

For installation using non-combustible materials.

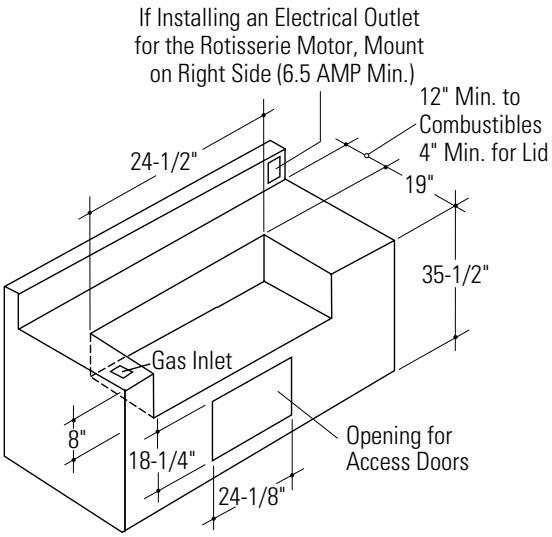

For installation using combustible materials. Requires ZX24JBSS insulation jacket.

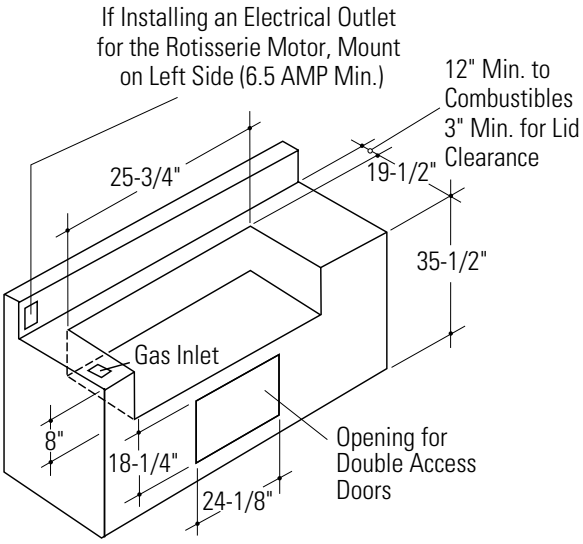

Installation in a combustible enclosure. ZX24JBSS insulated jacket is required.

- The insulated jacket must be supported from the bottom by a solid deck or ledge on each side beneath the jacket.
- Construct the enclosure as shown and place the insulated jacket into the enclosure. Place the cooking center into the jacket. No installation hardware is required.

Installation in a non-combustible enclosure

- In a non-combustible (masonry) enclosure, the grill drops into the opening. A deck or ledge on each side is required for support from the bottom.

Clearances - All Models

- Allow 3" at the rear for lid clearance.
- Allow at least 12" clearance at the back of the grill when exhaust is directed to a window or a surface that is difficult to clean.
- Allow at least 6" clearance on each side to any non-combustible material located above the cooking surface for counterspace. Rotisserie models also require 6" clearance for placing and handling the motor and skewer.
- Allow at least 12" clearance on each side to combustible vertical materials.

For answers to your Monogram,® GE Profile Performance Series,™ GE Profile™ or GE appliance questions, call GE Answer Center® service, 800.626.2000.

Listed by Underwriters Laboratories

Specification Revised 10/00

Monogram™

ZGG24L20BSS—GE Monogram 24" Outdoor Cooking Center

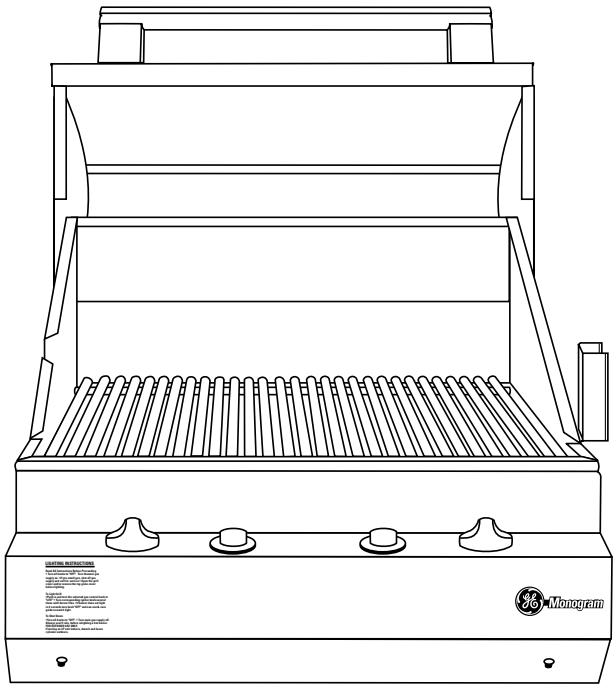

Features and Benefits

- Liquid Propane Gas Model
- 2 (15,000 BTU) Stainless Steel Gas Grill Burners
- Rotisserie Burner
- Rotary Multi-Spark Piezo Ignition
- Brass Control Valves
- Steel, Porcelain-Enameled Grill Grates
- Stainless Steel Tubular Handle
- LP Tank Included
- Model ZGG24L20BSS - Stainless steel

Specification Revised 10/00